



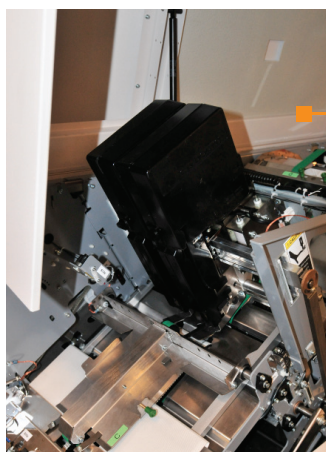

- The BDFE-x is C.P. Bourg's most compact high-speed booklet maker. Fully automated, it is capable of adjusting all its parameters via its touchscreen interface (GUI) and enables Automated In-Line Finishing applications. The paper flow follows a stitch-fold-trim process with guaranteed set integrity and a maximum speed of 4,200 booklets per hour.

The BDFE-x is connectable In-Line with a BSF-x and seamlessly integrates the benefits of Off-Line and In-Line finishing (Read about our Hybrid Solutions).

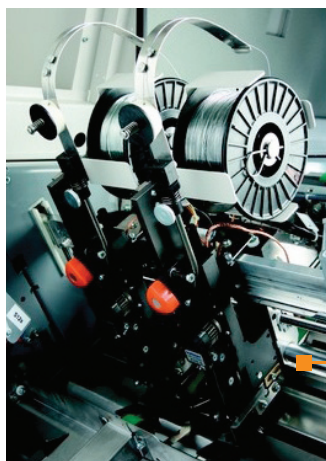

FEATURES	ADVANTAGES	BENEFITS
Large Paper Range	Maximum media size 520 x 356 mm (20.47 x 14.02 in) Minimum media size 203 x 120 mm (7.99 x 7.01 in)	Offers a wide range of booklet formats
Connectable to	iGen, ColorPress, Nuvera, DocuTech, DocuPrint, DocuColor families BSF-x compatible	A superior digital In-Line booklet making solution
Folds up to 88 page Booklets	Stitch fold trim up to 22 sheets	Able to process jobs with more content
Graphical User Interface (GUI) (optional)	User friendly industrial grade color touch screen Single GUI for all the finishing line	Easy to use interface
In-Operation Adjustments	Job adjustments can be performed via the GUI "Run" menu	Fine tuning adjustments of stitch, fold, trim while BDFE-x is in operation
Stitch Fold Trim	Automatic stitch head adjustment Self-adjusting trimming to book thickness	Automatic top, corner, side, or saddle stitching
2 to 4 Cassette Wire Heads (optional)	Hohner or ISP heads Hohner can accommodate a loop kit (optional)	Large range of stitching possibilities
ISP Head Features	Toolless cassette replacement	Plug & Play stitch heads
Purge Feature	Automatic ejection of faulted job and enables continuous production	Minimal time loss
Face Trimmer	With blower and waste bin	Fully automated trimming



BDFE-x
IN-LINE

TECHNICAL SPECIFICATIONS

POPULAR CONFIGURATIONS




Printer + BDFE-x

Printer + BCME-x + BDFE-x



DIMENSIONS

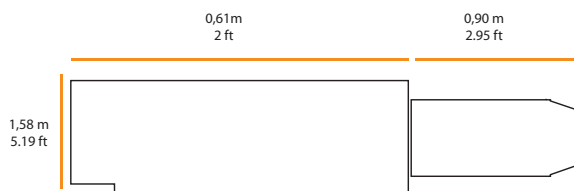

Category	Booklet Maker
Model	BDFE-x
Media/Sheet Sizes	
Input Sheet Size (saddle stitching)	(In Track) x (Cross Track)
Min	203.2 x 120 mm (8 x 4.72 in)
Max	520 x 356 mm (20.47 x 14.01 in)
Output Booklet Size (saddle stitching)	(In Track) x (Cross Track)
Min	76 x 120 mm (2.99 x 4.72 in)
Max	260 x 356 mm (10.23 x 14.01 in)
Fore-Edge Max Trimming	25 mm (0.98 in)
Input/Output Sheet Size (top/side stitching)	(In Track) x (Cross Track)
Min	160 x 120 mm (6.3 x 4.72 in)
Max	297 x 356 mm (11.69 x 14.01 in)
Media/Sheet Weights	
Min	60 gsm
Max	300 gsm
Maximum Speed	4200 sets/h
Power Supply	120 V $\pm$ 10% – 60 Hz – 10 A
	230 V $\pm$ 10% – 50 Hz – 7 A
Power Consumption	
Operational Mode	750 W
Radiant Heat (OM)	2560 BTU/h
Standby Mode	170 W
Radiant Heat (SM)	580 BTU/h
Sound Level	70 dB
Dimensions	
Length	1.58 m (5.19 ft)
Width	0.61 m (2.00 ft)
Height	1.94 m (6.36 ft)
Delivery Conveyor	0.90 m (2.95 ft)
Weight	450 kg (992.08 lbs)

MEDIA / SHEET SIZES

